

585W

SOLAR PANEL MONO-CRYSTALLINE




COMPREHENSIVE SYSTEM AND PRODUCT CERTIFICATION



IEC61215(2016), IEC61730(2016)
 ISO 9001:2015 / ISO Quality Management System
 ISO 14001:2015 / Environmental Management System
 ISO 45001:2018 / International Occupational Health and Safety Management System Certification

INDUSTRY-LEADING QUALITY ASSURANCE

Linear attenuation of 0.55% per year for 25 years

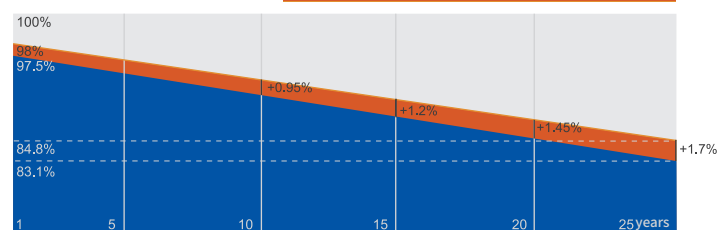

■ New linear power guarantee ■ Quasi linear power guarantee

PRODUCT CHARACTERISTICS



Multiple Main Gate Technology

Better light utilization and current collection, effectively improve product power output and reliability.



Better Heat Spot Resistance

By optimizing circuit design and working current, better temperature coefficient and heat spot resistance are obtained.



Anti-pid Guarantee

The attenuation rate caused by PID phenomenon is minimized through battery production technology optimization and material control.



Adaptability to Harsh Environments

Third party certification through high salt spray and high ammonia corrosion test, suitable for high temperature and humidity, coastal, desert, lake and other harsh environment.



Super Mechanical Load

It can carry 5400Pa snow load
 It can bear 2400Pa wind pressure



Excellent Product Materials

Excellent product material and process quality assurance



Linear Power Warranty

Linear attenuation of 0.55% per year for 25 years



±3% Positive Tolerance

±3% Positive Tolerance



Office Location

Building A, International Fortune Center, Rizhao City, Shandong Province, China

Electrical Parameters Under STC

Solar Module Type: BCT-585W

Maximum Power at STC (Pmax) [W]	585
Open-Circuit Voltage (Voc) [V]	51.16
Optimum Operating Voltage (Vmp) [V]	42.52
Short-Circuit Current (Isc) [A]	14.55
Optimum Operating Current (Imp) [A]	13.76
Module Efficiency STC (%)	22.65
Standard test conditions (STC) : irradiance 1000W/m ² , battery temperature 25°C, AM1.5, power tolerance: ±3%	

Mechanical Parameter

Cell type	N type Mono-crystalline
Number of Cells	144(2×72)
Component Size	2278±1mm×1134±1mm×30±0.5mm
Component Weight	28kg
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Backboard	White
Component Frame	Anodized aluminium alloy
Junction Box	IP68 Rated
Cable Cross-Sectional Area	4mm ²
Cable Length	(+): 300mm, (-): 200mm or Customized Length

Electrical Property Parameter

Working Temperature	-40°C~+85°C
Maximum System Voltage	1000/1500V DC
Maximum Fuse Rated Current	25A
Power Tolerance	0~+3%


Temperature Characteristic

Temperature Coefficient (Pmax)	-0.29%/°C
Temperature Coefficient (Voc)	-0.25%/°C
Temperature Coefficient (Isc)	+0.045%/°C
Nominal Operating Temperature (NOTC)	45±2°C


Packaging Configuration

20'GP Container 2 pcs/carton 155 cartons/20'GP 310 pcs
 40'HQ Container 37 pcs/pallet 20 pallets/40'HQ 740 pcs
 13.5m Land Truck 37 pcs/pallet 22 pallets/truck 814 pcs

Engineering Drawings

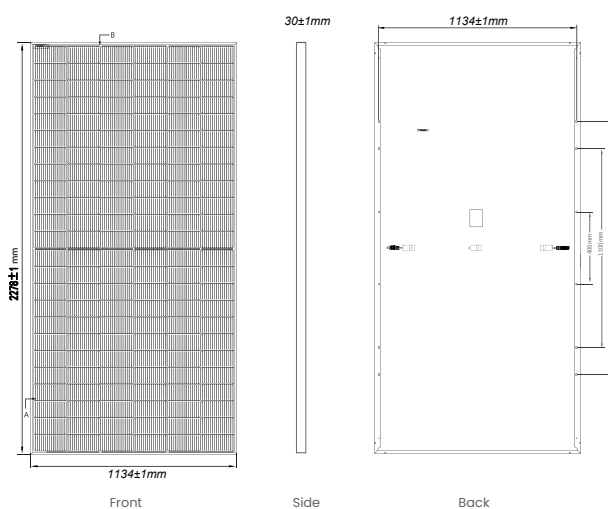

Characteristic Curve

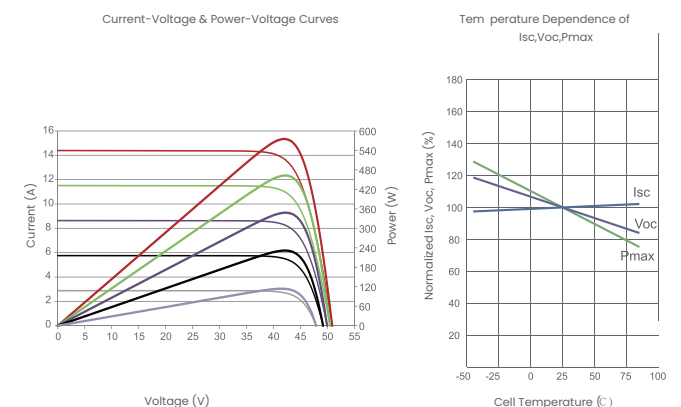

- * 25-year quality assurance; 25-year linear output power guarantee.
- * With the technical progress and product update, the technical parameters of the components of Blue Carbon may differ from the technical parameters contained in this specification. Blue Carbon has the right to adjust the technical parameters at any time without notifying the customer, and the final interpretation of the technical specification belongs to Blue Carbon.

